

PH01S



Apparecchio monodirezionale per esterni da parete.

Corpo rettangolare in alluminio estruso con frontale in vetro. Fissaggio a parete con apposita staffa. L'innovativo sistema di montaggio, tramite l'utilizzo di colle ad altissimo fissaggio, permette l'eliminazione delle viti, rendendo il prodotto pulito ed elegante. Disponibile con LED da 9W, in diverse tonalità di bianco con alimentazione 230Vac oppure in versione RGB con alimentazione 24Vdc. Disponibile in varie finiture da abbinare al contesto. Ideale per illuminazione di pareti ed ottenere effetti decorativi.

Led color

- 1** = 3000°K (741 lumen)
- 2** = 6000°K (849 lumen)
- 7** = RGB
- 9** = 4000°K (798 lumen)

Power supply

- 5** = 24Vdc
- 6** = 230Vac


Code	PH01S
Power	9W (3 LED HP SMD)
Led color	1-2-9
Spot	A-B-D
Power supply	6
Finishing	A-B-M-N

Code	PH01S
Power	9W (3 LED RGB)
Led color	7
Spot	B-D
Power supply	5
Finishing	A-B-M-N


Monodirectional wall mounting device for outdoor.

Rectangular body in extruded aluminum with frontal glass. Wall fixing with special bracket. The innovative assembling system, with the use of very strength glue, eliminates screws and makes the Phoenix serie clean, minimal and elegant. Available with 9W power LEDs in different white color temperature with input voltage 230Vac or RGB version with input voltage 24Vdc. Available in various finishes to match the context. Ideal for wall lighting and decorative effects.


Spot



A = 15° **B** = 45° **D** = 120°

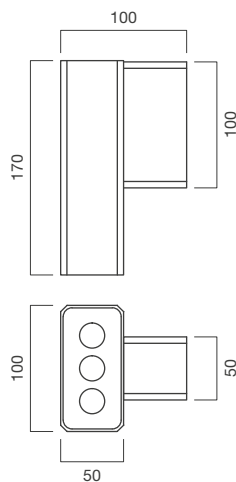


Finiture / Finishing

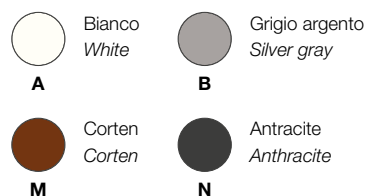

Esempio codice / Code example

PH01S9W7D5B

Diagramma a cono rilevato con LED HP SMD, lente 45°, bianco caldo.
Cone diagram measured with warm white, HP SMD LED, lens 45°.

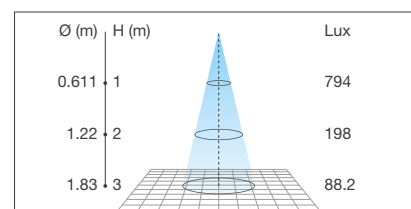



Apparecchio bidirezionale per esterni da parete.

Corpo rettangolare in alluminio estruso con frontale in vetro. Fissaggio a parete con apposita staffa. L'innovativo sistema di montaggio, tramite l'utilizzo di colle ad altissimo fissaggio, permette l'eliminazione delle viti, rendendo il prodotto pulito ed elegante. Disponibile con LED da 18W (9+9W), in diverse tonalità di bianco con alimentazione 230Vac oppure in versione RGB con alimentazione 24Vdc. Disponibile in varie finiture da abbinare al contesto. Ideale per illuminazione di pareti ed ottenere effetti decorativi.

Led color

- 1** = 3000°K (1482 lumen)
- 2** = 6000°K (1698 lumen)
- 7** = RGB
- 9** = 4000°K (1596 lumen)

Power supply

- 5** = 24Vdc
- 6** = 230Vac



Code	PH02S
Power	18W (3+3 LED HP SMD)
Led color	1-2-9
Spot	A-B-D
Power supply	5-6
Finishing	A-B-M-N

Code	PH02S
Power	18W (3+3 LED RGB)
Led color	7
Spot	B-D
Power supply	5
Finishing	A-B-M-N


Bidirectional wall mounting device for outdoor.

Rectangular body in extruded aluminum with frontal glass. Wall fixing with special bracket. The innovative assembling system, with the use of very strength glue, eliminates screws and makes the Phoenix serie clean, minimal and elegant. Available with 18W power LEDs (9+9W) in different white color temperature with input voltage 230Vac or RGB version with input voltage 24Vdc. Available in various finishes to match the context. Ideal for wall lighting and decorative effects.

Spot

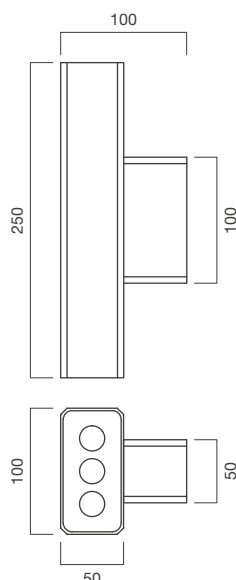


Finiture / Finishing

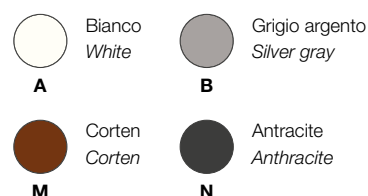

Esempio codice / Code example

PH02S18W2D5M

Diagramma a cono rilevato con LED HP SMD, lente 45°, bianco caldo.
Cone diagram measured with warm white, HP SMD LED, lens 45°.

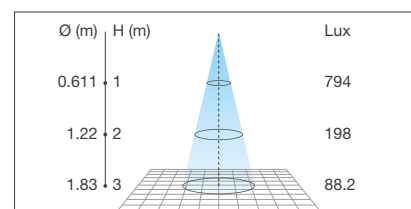

PH03S

PH11S




Apparecchi monodirezionali di potenza per esterni da parete.

Corpo quadrato in alluminio estruso con frontale in vetro. Fissaggio a parete con apposita staffa. L'innovativo sistema di montaggio, tramite l'utilizzo di colle ad altissimo fissaggio, permette l'eliminazione delle viti, rendendo il prodotto pulito ed elegante. Disponibile con LED COB di potenza 10W (PH03S) o 20W (PH11S) in varie tonalità di bianco e in varie finiture da abbinare al contesto. Ideale per illuminazione di pareti.


Monodirectional wall mounting hi power device for outdoor.

Square body in extruded aluminum with frontal glass. Wall fixing with special bracket. The innovative assembling system, with the use of very strength glue, eliminates screws and makes the Phoenix series clean, minimal and elegant. Available with 10W power COB LEDs (PH03S) or 20W (PH11S) in different white color temperature and in various finishes to match the context. Ideal for wall lighting.

Spot



Finiture / Finishing

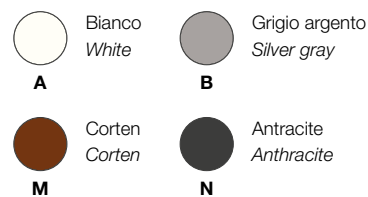

Esempio codice / Code example

PH11S20W9F6B

Led color	Power supply
1 = 3000°K (980 lumen)	6 = 230Vac
2 = 5700°K (1010 lumen)	
9 = 4000°K (1000 lumen)	

Code	PH03S
Power	10W (1 LED COB)
Led color	1-2-9
Spot	A-B-T
Power supply	6
Finishing	A-B-M-N





Diagramma a cono rilevato con LED COB, lente 45°, bianco naturale.
Cone diagram measured with natural white, COB LED, lens 45°.

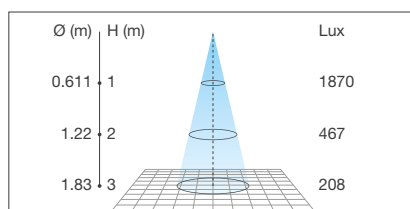

Led color	Power supply
1 = 3000°K (1950 lumen)	6 = 230Vac
2 = 5700°K (2000 lumen)	
9 = 4000°K (1980 lumen)	

Code	PH11S
Power	20W (1 LED COB)
Led color	1-2-9
Spot	B-F-T
Power supply	6
Finishing	A-B-M-N


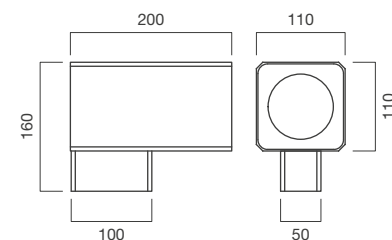



Diagramma a cono rilevato con LED COB, lente 45°, bianco naturale.
Cone diagram measured with natural white, COB LED, lens 45°.

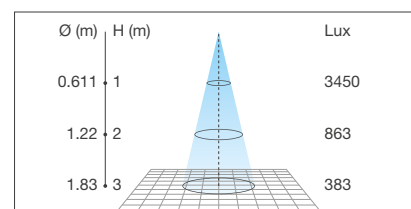

PH04S

PH12S

Phoenix

20
W/tot

Apparecchi bidirezionali di potenza per esterni da parete.

Corpo quadrato in alluminio estruso con frontale in vetro. Fissaggio a parete con apposita staffa. L'innovativo sistema di montaggio, tramite l'utilizzo di colle ad altissimo fissaggio, permette l'eliminazione delle viti, rendendo il prodotto pulito ed elegante. Disponibile con 2 LED COB di potenza 10W (PH04S) o 20W (PH12S) in varie tonalità di bianco e in varie finiture da abbinare al contesto. Ideale per illuminazione di pareti.

Led color

- 1** = 3000°K (1960 lumen)
2 = 5700°K (2020 lumen)
9 = 4000°K (2000 lumen)



Power supply

- 6** = 230Vac


Code	PH04S
Power	10W (x 2 LED COB)
Led color	1-2-9
Spot	A-B-D-T
Power supply	6
Finishing	A-B-M-N

Bidirectional wall mounting hi power device for outdoor.


Square body in extruded aluminum with frontal glass. Wall fixing with special bracket. The innovative assembling system, with the use of very strength glue, eliminates screws and makes the Phoenix series clean, minimal and elegant. Available with 2 x 10W power COB LEDs (PH04S) or 20W (PH12S) in different white color temperature and in various finishes to match the context. Ideal for wall lighting.

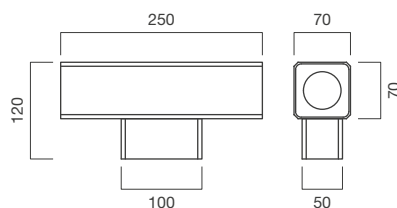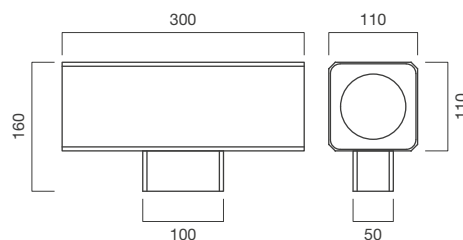

Spot



Finiture / Finishing

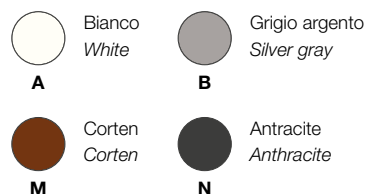

Esempio codice / Code example

PH04S10W2A6M

Diagramma a cono rilevato con LED COB, lente 45°, bianco naturale.
 Cone diagram measured with natural white, COB LED, lens 45°.



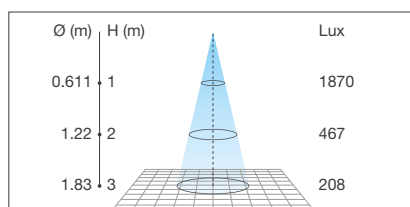


Diagramma a cono rilevato con LED COB, lente 45°, bianco naturale.
 Cone diagram measured with natural white, COB LED, lens 45°.

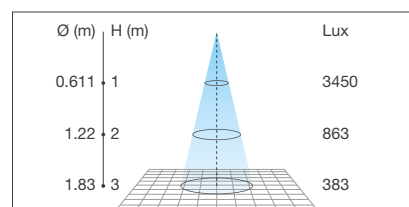

PH05R

PH11R

10
W/tot

Apparecchi monodirezionali di potenza per esterni da parete.

Corpo tondo in alluminio estruso con frontale in vetro. Fissaggio a parete con apposita staffa. L'innovativo sistema di montaggio, tramite l'utilizzo di colle ad altissimo fissaggio, permette l'eliminazione delle viti, rendendo il prodotto pulito ed elegante. Disponibile con LED COB di potenza 10W (PH05R) o 20W (PH11R) in varie tonalità di bianco e in varie finiture da abbinare al contesto. Ideale per illuminazione di pareti.

Monodirectional wall mounting hi power device for outdoor.

Round body in extruded aluminum with frontal glass. Wall fixing with special bracket. The innovative assembling system, with the use of very strength glue, eliminates screws and makes the Phoenix series clean, minimal and elegant. Available with 10W power COB LEDs (PH05R) or 20W (PH11R) in different white color temperature and in various finishes to match the context. Ideal for wall lighting.

Led color

- 1** = 3000°K (980 lumen)
2 = 5700°K (1010 lumen)
9 = 4000°K (1000 lumen)

Power supply

6 = 230Vac

Code	PH05R
Power	10W (1 LED COB)
Led color	1-2-9
Spot	A-B-D-T
Power supply	6
Finishing	A-B-M-N



Led color

- 1** = 3000°K (1950 lumen)
2 = 5700°K (2000 lumen)
9 = 4000°K (1980 lumen)


Power supply

6 = 230Vac


Code	PH11R
Power	20W (1 LED COB)
Led color	1-2-9
Spot	B-D-F-T
Power supply	6
Finishing	A-B-M-N

20
W/tot

Spot



Finiture / Finishing

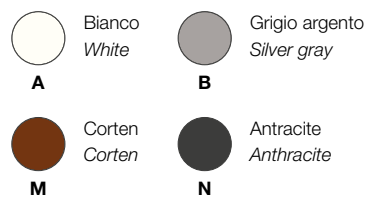

Esempio codice / Code example

PH05R10W1D6B

Diagramma a cono rilevato con LED COB, lente 45°, bianco naturale.
 Cone diagram measured with natural white, COB LED, lens 45°.


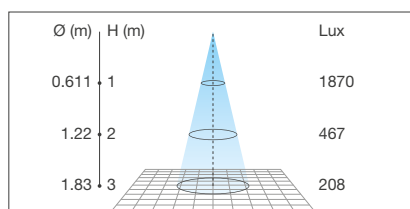



Diagramma a cono rilevato con LED COB, lente 45°, bianco naturale.
 Cone diagram measured with natural white, COB LED, lens 45°.

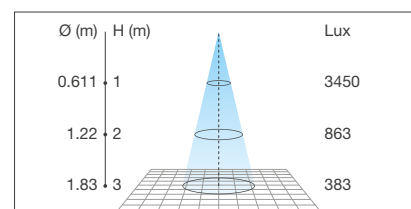

PH06R

PH12R

Phoenix

20
W/tot

Apparecchi bidirezionali di potenza per esterni da parete.

Corpo tondo in alluminio estruso con frontale in vetro. Fissaggio a parete con apposita staffa. L'innovativo sistema di montaggio, tramite l'utilizzo di colle ad altissimo fissaggio, permette l'eliminazione delle viti, rendendo il prodotto pulito ed elegante. Disponibile con 2 LED COB di potenza 10W (PH06R) o 20W (PH12R) in varie tonalità di bianco e in varie finiture da abbinare al contesto. Ideale per illuminazione di pareti.

Led color

- 1** = 3000°K (1960 lumen)
2 = 5700°K (2020 lumen)
9 = 4000°K (2000 lumen)

Power supply



- 6** = 230Vac

Code	PH06R
Power	10W (x 2 LED COB)
Led color	1-2-9
Spot	A-B-D-T
Power supply	6
Finishing	A-B-M-N


Bidirectional wall mounting hi power device for outdoor.

Round body in extruded aluminum with frontal glass. Wall fixing with special bracket.


The innovative assembling system, with the use of very strength glue, eliminates screws and makes the Phoenix series clean, minimal and elegant. Available with 2 x 10W power COB LEDs (PH06R) or 20W (PH12R) in different white color temperature and in various finishes to match the context. Ideal for wall lighting.

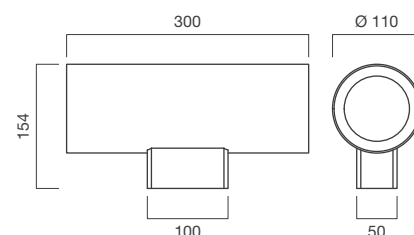

Spot



Finiture / Finishing

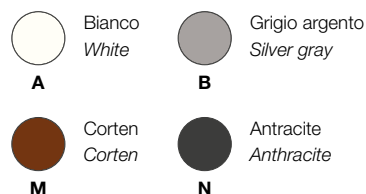

Esempio codice / Code example

PH12R20W9F6N

Diagramma a cono rilevato con LED COB, lente 45°, bianco naturale.
 Cone diagram measured with natural white, COB LED, lens 45°.


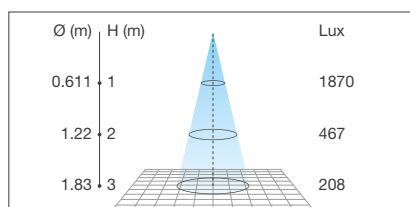


Diagramma a cono rilevato con LED COB, lente 45°, bianco naturale.
 Cone diagram measured with natural white, COB LED, lens 45°.

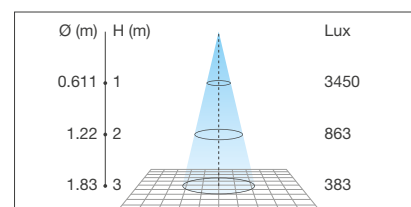

PH03C

PH11C

**Apparecchi a plafone di potenza per esterni.**

Corpo quadrato in alluminio estruso con frontale in vetro. Fissaggio a soffitto con apposita staffa. L'innovativo sistema di montaggio, tramite l'utilizzo di colle ad altissimo fissaggio, permette l'eliminazione delle viti, rendendo il prodotto pulito ed elegante.

Disponibile con LED COB di potenza 10W (PH03C) o 20W (PH11C) in varie tonalità di bianco e in varie finiture da abbinare al contesto. Ideale per l'installazione su portici o tettoie.

Led color

- 1** = 3000°K (980 lumen)
2 = 5700°K (1010 lumen)
9 = 4000°K (1000 lumen)

Power supply

- 6** = 230Vac

Code	PH03C
Power	10W (1 LED COB)
Led color	1-2-9
Spot	A-B-D-T
Power supply	6
Finishing	A-B-M-N

Led color

- 1** = 3000°K (1950 lumen)
2 = 5700°K (2000 lumen)
9 = 4000°K (1980 lumen)




Power supply

- 6** = 230Vac


Code	PH11C
Power	20W (1 LED COB)
Led color	1-2-9
Spot	B-D-F-T
Power supply	6
Finishing	A-B-M-N

Ceiling mounting hi power device for outdoor.

Square body in extruded aluminum with frontal glass. Ceiling fixing with special bracket. The innovative assembling system, with the use of very strength glue, eliminates screws and makes the Phoenix series clean, minimal and elegant. Available with 10W power COB LEDs (PH03C) or 20W (PH11C) in different white color temperature and in various finishes to match the context. Ideal for arcades or canopies.

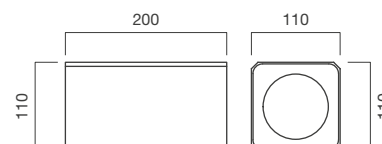**Spot**

A = 15° T = 25° B = 45° F = 60° D = 120°

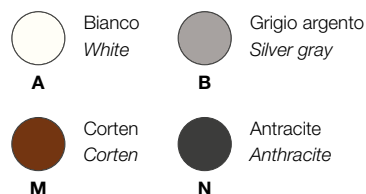Finiture / Finishing**Esempio codice / Code example**

PH11C20W1D6B

Diagramma a cono rilevato con LED COB, lente 45°, bianco naturale.
 Cone diagram measured with natural white, COB LED, lens 45°.


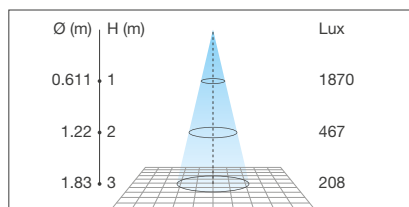



Diagramma a cono rilevato con LED COB, lente 45°, bianco naturale.
 Cone diagram measured with natural white, COB LED, lens 45°.

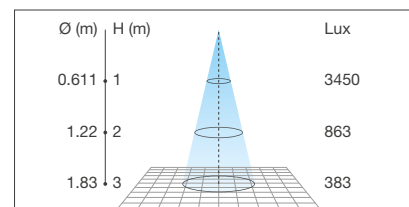

PH05T

PH11T

Phoenix

10
W/tot**Apparecchi a plafone di potenza per esterni.**

Corpo tondo in alluminio estruso con frontale in vetro. Fissaggio a soffitto con apposita staffa. L'innovativo sistema di montaggio, tramite l'utilizzo di colle ad altissimo fissaggio, permette l'eliminazione delle viti, rendendo il prodotto pulito ed elegante.

Disponibile con LED COB di potenza 10W (PH05T) o 20W (PH11T) in varie tonalità di bianco e in varie finiture da abbinare al contesto. Ideale per l'installazione su portici o tettoie.

Led color

- 1** = 3000°K (980 lumen)
2 = 5700°K (1010 lumen)
9 = 4000°K (1000 lumen)

Power supply



- 6** = 230Vac

Code	PH05T
Power	10W (1 LED COB)
Led color	1-2-9
Spot	A-B-D-T
Power supply	6
Finishing	A-B-M-N


Ceiling mounting hi power device for outdoor.

Round body in extruded aluminum with frontal glass. Ceiling fixing with special bracket.

The innovative assembling system, with the use of very strength glue, eliminates screws and makes the Phoenix series clean, minimal and elegant. Available with 10W power COB LEDs (PH05T) or 20W (PH11T) in different white color temperature and in various finishes to match the context. Ideal for arcades or canopies.




Spot



A = 15° **T** = 25° **B** = 45° **F** = 60° **D** = 120°

Finiture / Finishing

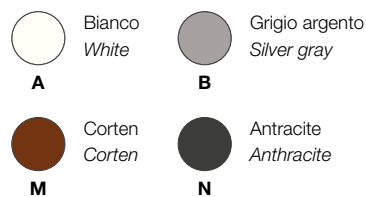

Esempio codice / Code example

PH05T10W9B6A

Diagramma a cono rilevato con LED COB, lente 45°, bianco naturale.
 Cone diagram measured with natural white, COB LED, lens 45°.

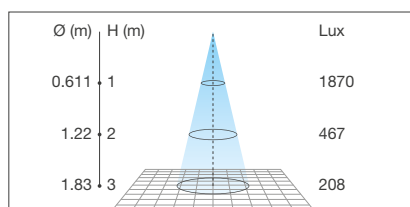


Diagramma a cono rilevato con LED COB, lente 45°, bianco naturale.
 Cone diagram measured with natural white, COB LED, lens 45°.

